


WOODFIELD

**SAFE ACCESS
SOLUTIONS**



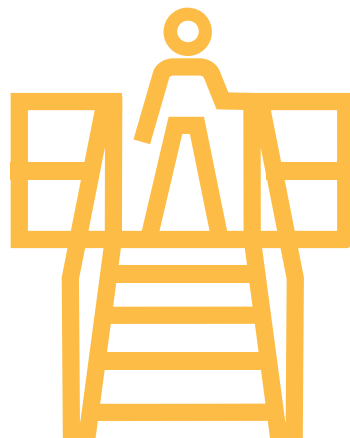

SAFE ACCESS SOLUTIONS

We build safety access systems for safe and efficient loading, unloading, venting, and inspecting operations. Our safe access equipment includes stairs, platforms, and gangways for ships/barges, tank trucks, rail wagons and ISO tank containers.

STANDARD FEATURES

FOLDING STAIRS

Standard 3, 4, 5 & 6 step configuration or custom >6 step
Self supported design with HD safety chains.
Non self supported available
230kg working load capacity
Self leveling non-slip step treads through the working range
Working range of -40° to +45° from the platform to the vehicle
Parks out of the way at approx. 80°
Safety hand rails at 1100mm min. height from the step tread surface
Mid rails and toe rails
Easy grab operating handles
HD safety chains
Standard foot lock
Extra length end step
Easy adjust tension springs assist movement. Pneumatic or hydraulic systems available for larger units
Available in aluminum, stainless steel and galvanized carbon steel, primed or painted
Standard tread widths in mm: 610, 800, 915, 1220, 1525, 1830
Modular construction for ease of installation, maintenance and repair
Padded leading edge to help protect top of vehicle
Available horizontal tracking models for maximum miss-spot situations with optional track lock

LARGE ACCESS FOLDING STAIRS

Extended Safety Cage to access full or part length of the tank top for tank trucks, rail cars or ISO tank containers
Full length step inside safety cage
Optional adjustable safety rails for ISO containers and different length vehicles
Custom sizes of Folding Stairs and Safety Cages to suit each application
Standard 3, 4, 5 and 6 step configuration or custom >6 step
Self-supporting design.
Depending on size, position and materials of construction, support beams and/or columns will be supplied
230kg working load capacity
Self leveling non-slip step treads through the working range
Working range of -40° to +45° from the platform to the vehicle
Parks out of the way at approx. 80°
Safety hand rails at 1100mm min. height from the step tread surface
Mid rails and toe rails
HD safety chains
Standard foot lock
Easy adjust tension springs
Pneumatic or hydraulic systems available for larger units
Available in aluminum, stainless steel and galvanized carbon steel, primed or painted
Standard tread widths in mm: 610, 800, 1220, 1525, 1830
Modular construction
Padded leading edge to help protect top of vehicle



SAFETY CAGES TO SUIT ALL FOLDING STAIRS

Typical standard size of 1220mm x 1830mm x 800mm for tank truck.
Overall height 1100mm

Typical standard size of 2440mm x 2440mm x 800mm for rail car.
Overall height 1100mm Or custom size to suit each application

Full height or top only for some rail cars

Full floor covering with lift up inspection panels in aluminum, stainless steel and GRP

QUICK PLATFORMS

10'-6" Platform heights available for Tank Truck or Iso Container access

12'-0" Platform heights available for Rail Car access

Platform sizing available,

QP1.6'x4' with 10" galvanized steel pedestal or QP2.8'x4' tower with 8" galvanized steel columns

Galvanized steel non-slip open-serrated platform walking surface

Single sided designed to accept 1 x Woodfield FS Folding Stair or GW Gangway Or, double-sided for double vehicle lanes. Designed to accept 2 Folding Stairs or GW Gangways

Full Canopy coverage for single or double-sided platforms Or, Platform walk surface with Sunshades

42" OSHA compliant handrails with mid rail and kick plate, powder coated in Woodfield Yellow

IBC compliant 7/11 Access Stairs, galvanized steel, non-slip stair tread

Specially designed to support Woodfield Loading or Unloading Arms

Detailed assembly instructions and full fitting kit provided

GANGWAYS

Available in fixed length or extendable configurations for optimal reach

Self supporting design with HD safety chains. Non self supporting available

Non slip walking surface

230kg working load capacity

Working range of -20° to +20° from the platform to the vehicle

Parks out of the way at approx. 80°

Safety hand rails at 1100mm min. height from the Gangway walking surface

Mid rails and toe rails

Easy grab operating handles

HD safety chains

Standard foot lock

Easy adjust tension springs

Available in aluminum, stainless steel and galvanized carbon steel, primed or painted

Standard gangway widths in mm: 800, 915, 1220, 1525, 1830

Modular construction for ease of installation, maintenance and repair

Padded leading edge to help protect top of vehicle

Available horizontal tracking models for maximum miss-spot situations and optional track lock

MARINE GANGWAYS

Our products facilitate safe and effortless access during operation and maintenance. Utilising a unique telescopic system, the gangways can adapt to a vessel's tidal movements and stay operational even under severe sea conditions.

Designed based on the latest technological innovations and practical applications, these gangways have anti-slip walkways, handrails and wide walkways.



Produced in collaboration with Prosertek

